


Kyla Gen 2 Smart Light Switch

Available in 1/ 2/ 3 Gang Variants
KWS-211-ZB / KWS-212-ZB / KWS-213-ZB

Overview



Kyla Smart Light Switch allows you to control your home lighting from the Kyla app on your smartphone, by using your voice via Google Assistant /Amazon Alexa, or from the wall switch.

The innovative Smart Light Switch with Live wire-only design eliminates the need for Neutral wire, saving you the cost of additional wiring works and making your smart lighting conversion process simpler than ever.

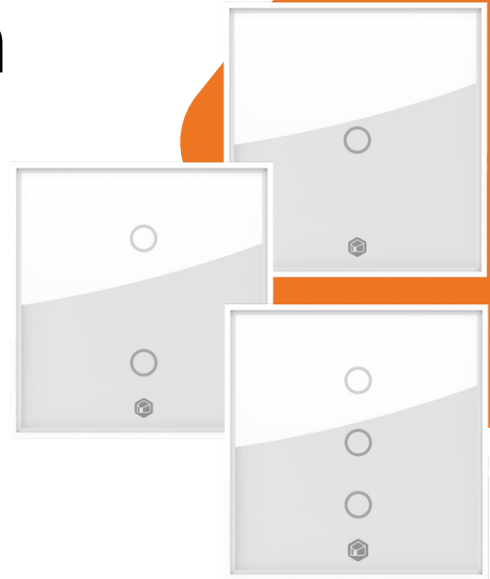

Features

- No Neutral Wire – Innovative Live only design eliminates the hassle of any complicated neutral wiring works
- DIY Installation – Changing to Smart Dimmer Switch made easier and simpler!
- Touch Panel – Lightly touch the glass panel to turn it on/off, or dim brightness
- Backlit Design – Visible to locate in the dark
- Hub Required – Hub required for smart features such as app control and voice control
- Remotely Control – Control, automate, and schedule via Kyla app on smartphone
- Voice control – Compatible with Google Assistant and Amazon Alexa for voice control command

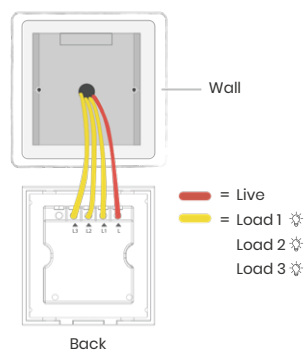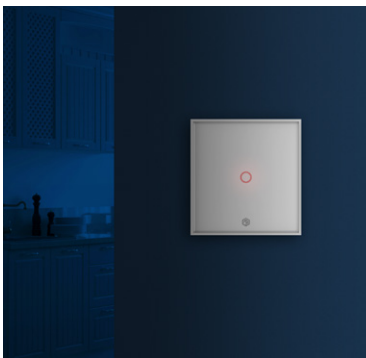

Works with Google Home and Amazon Alexa for voice control.



Specifications

Input	100–240VAC, 50/60Hz
Operating Temp.	0~40°C
Operating Humidity	30%–80% RH
Certificates	CE, IMDA
Minimum Loading	≥ 20W for incandescent ≥ 7W for LED
Communication Dist.	10m to Hub (indoor)
Material of Housing	Reinforced glass and Fireproof PC
Colour	White
Maximum Load	1-Gang : 600W 2-Gang: 300W 3-Gang: 200W
Connectivity	Zigbee
Product Dimensions	L90 x W85 x H35 mm

SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE

Kyla Gen 2 Smart Dimmer Switch

KSWS-214-ZB

Overview


Kyla Smart Dimmer Switch lets you set the mood and dim the lights smoothly from the Kyla app on your smartphone, by using your voice via Google Assistant /Amazon Alexa, or from the wall switch.

The innovative Smart Dimmer Switch with Live wire-only design eliminates the need for Neutral wire, saving you the cost of additional wiring works and making your smart lighting conversion process simpler than ever.



Features

- No Neutral Wire – Innovative Live only design eliminates the hassle of any complicated neutral wiring works
- DIY Installation – Changing to Smart Dimmer Switch made easier and simpler!
- Touch Panel – Lightly touch the glass panel to turn it on/off, or dim brightness
- Backlit Design – Visible to locate in the dark
- Hub Required – Hub required for smart features such as app control and voice control
- Remotely Control – Control, automate, and schedule via Kyla app on smartphone
- Voice control – Compatible with Google Assistant and Amazon Alexa for voice control command

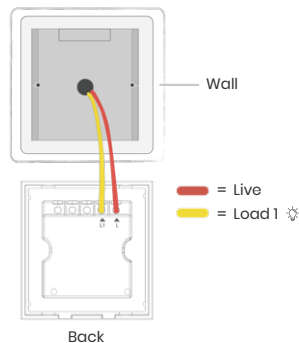

Specifications

Input	100–240VAC, 50Hz
Operating Temp.	0~40°C
Operating Humidity	30%–80% RH
Certificates	CE, IMDA
Communication Dist.	10m to Hub (indoor)
Material of Housing	Reinforced glass and Fireproof PC
Colour	White
Connectivity	Zigbee
Product Dimensions	L90 x W85 x H35 mm

Works with Google Home and Amazon Alexa for voice control.



SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE